

PANELS – Horizontal


Panels 20 mm – 3 layers

Dimensions : 20 x 1220 x 2440 mm

Weight : 42,35 kg

Color Caramel P20HC1220

Color Naturel P20HN1220

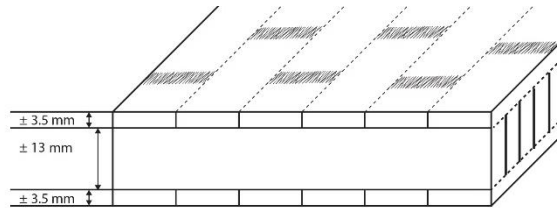


Panels 30 mm – 5 layers

Dimensions : 30 x 1220 x 2440 mm

Weight : 64.30 kg

Color Caramel P30HC1220

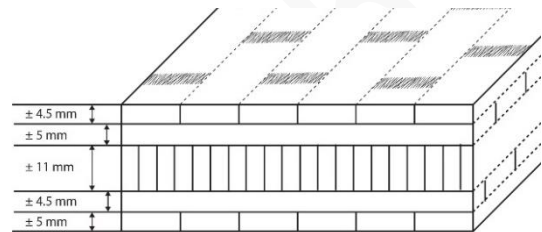

Panels 40 mm – 5 layers

Dimensions : 40 x 650 x 3050 mm

40 x 1220 x 2440 mm


Weight : 57.10 kg for width 650

85.73 kg for width 1220

Color Caramel P40HC650

P40HC1220

Color Naturel P40HN1220

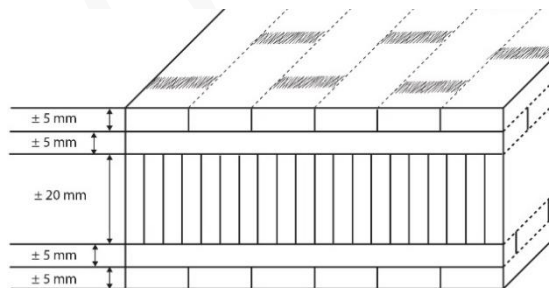

Coating: Our panels are delivered untreated, we recommend to finish them with Woca® oil or Bona® varnish.

Maintenance : According to chosen coating

Storage : The panels should be stored flat

Wrapping : individual in cardboard

Technical characteristics:

BRINELL HARDNESS	86 N/mm ² - norm EN 1534 (Report CTIB 5229/2)
CONTRACTION COEFFICIENT	0,14% per % humidity variation
HUMIDITY CONTENT	10% at 20 °C and 65% relative humidity 8% at 20 °C and 50% relative humidity
DENSITY	740 kg/m ³
FORMALDEHYDE EMISSION	0,04 mg/ m ² h - norm EN 717-2 (Report CTIB 5229/2)
THERMIC RESISTANCE	0,072 m ² ·K/W - norme EN 12664 (Report CTIB 5229/2)
PCP CONTENT	Below detection limit

