

**Packaging :** 2 pieces per box  
Each plank includes the riser which can be cut to desired size.

**Dimensions :** 1200 x 500 x 16/24mm

**Thickness :** 16mm (24mm at the head of plank)

**Structure :** 3 crossed layers of bamboo

**Gross weight :** 10 kg/box (Bamwood®)  
8 kg/box (vertical)

**Colors :** Vertical caramel, Bamwood® caramel, Bamwood® champagne or gold (according to applied coating)


**Alternative uses :** radiator shelf, work surface,  
window sill

**Coating:** All our panels are delivered unfinished.  
We advise coating with Woca® oil or Bona® varnish

**Maintenance :** To be adapted to the applied coating.

**Storage :** The staircase panels should always be stored horizontally

**Wrapping :** Individual (per 2) in cardboard

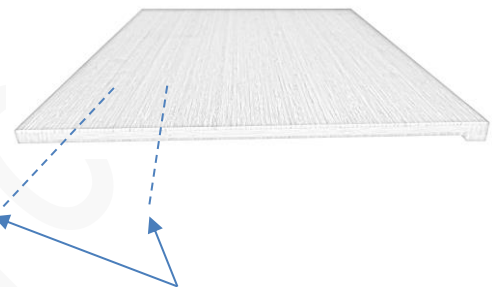

The plank includes the riser which can be cut to desired size.

### Technical specifications :

BRINELL HARDNESS	EN 1534 norm(Rapport CTIB 5229/2) Vertical : 43 N/mm <sup>2</sup> Bamwood® : 86 N/mm <sup>2</sup>
CONTRACTION COEFFICIENT TAUX D'HUMIDITÉ	0,14% per % of humidity variation 10% to 20 °C and 65% of relative humidity 8% to 20 °C and 50% of relative humidity
DENSITY	740 kg/m <sup>3</sup> (vertical) and 1050 kg/m <sup>3</sup> (Bamwood®)
FORMALDEHYDE EMISSION	0,04 mg/ m <sup>2</sup> h - EN 717-2 norm (Rapport CTIB 5229/2)
THERMAL RESISTANCE	0,072 m <sup>2</sup> ·K/W - EN 12664 norm (Rapport CTIB 5229/2)
PCP RATE	Under detection limit (Rapport CTIB 5229/2)

**BAMBOO**Touch®



BambooTouch